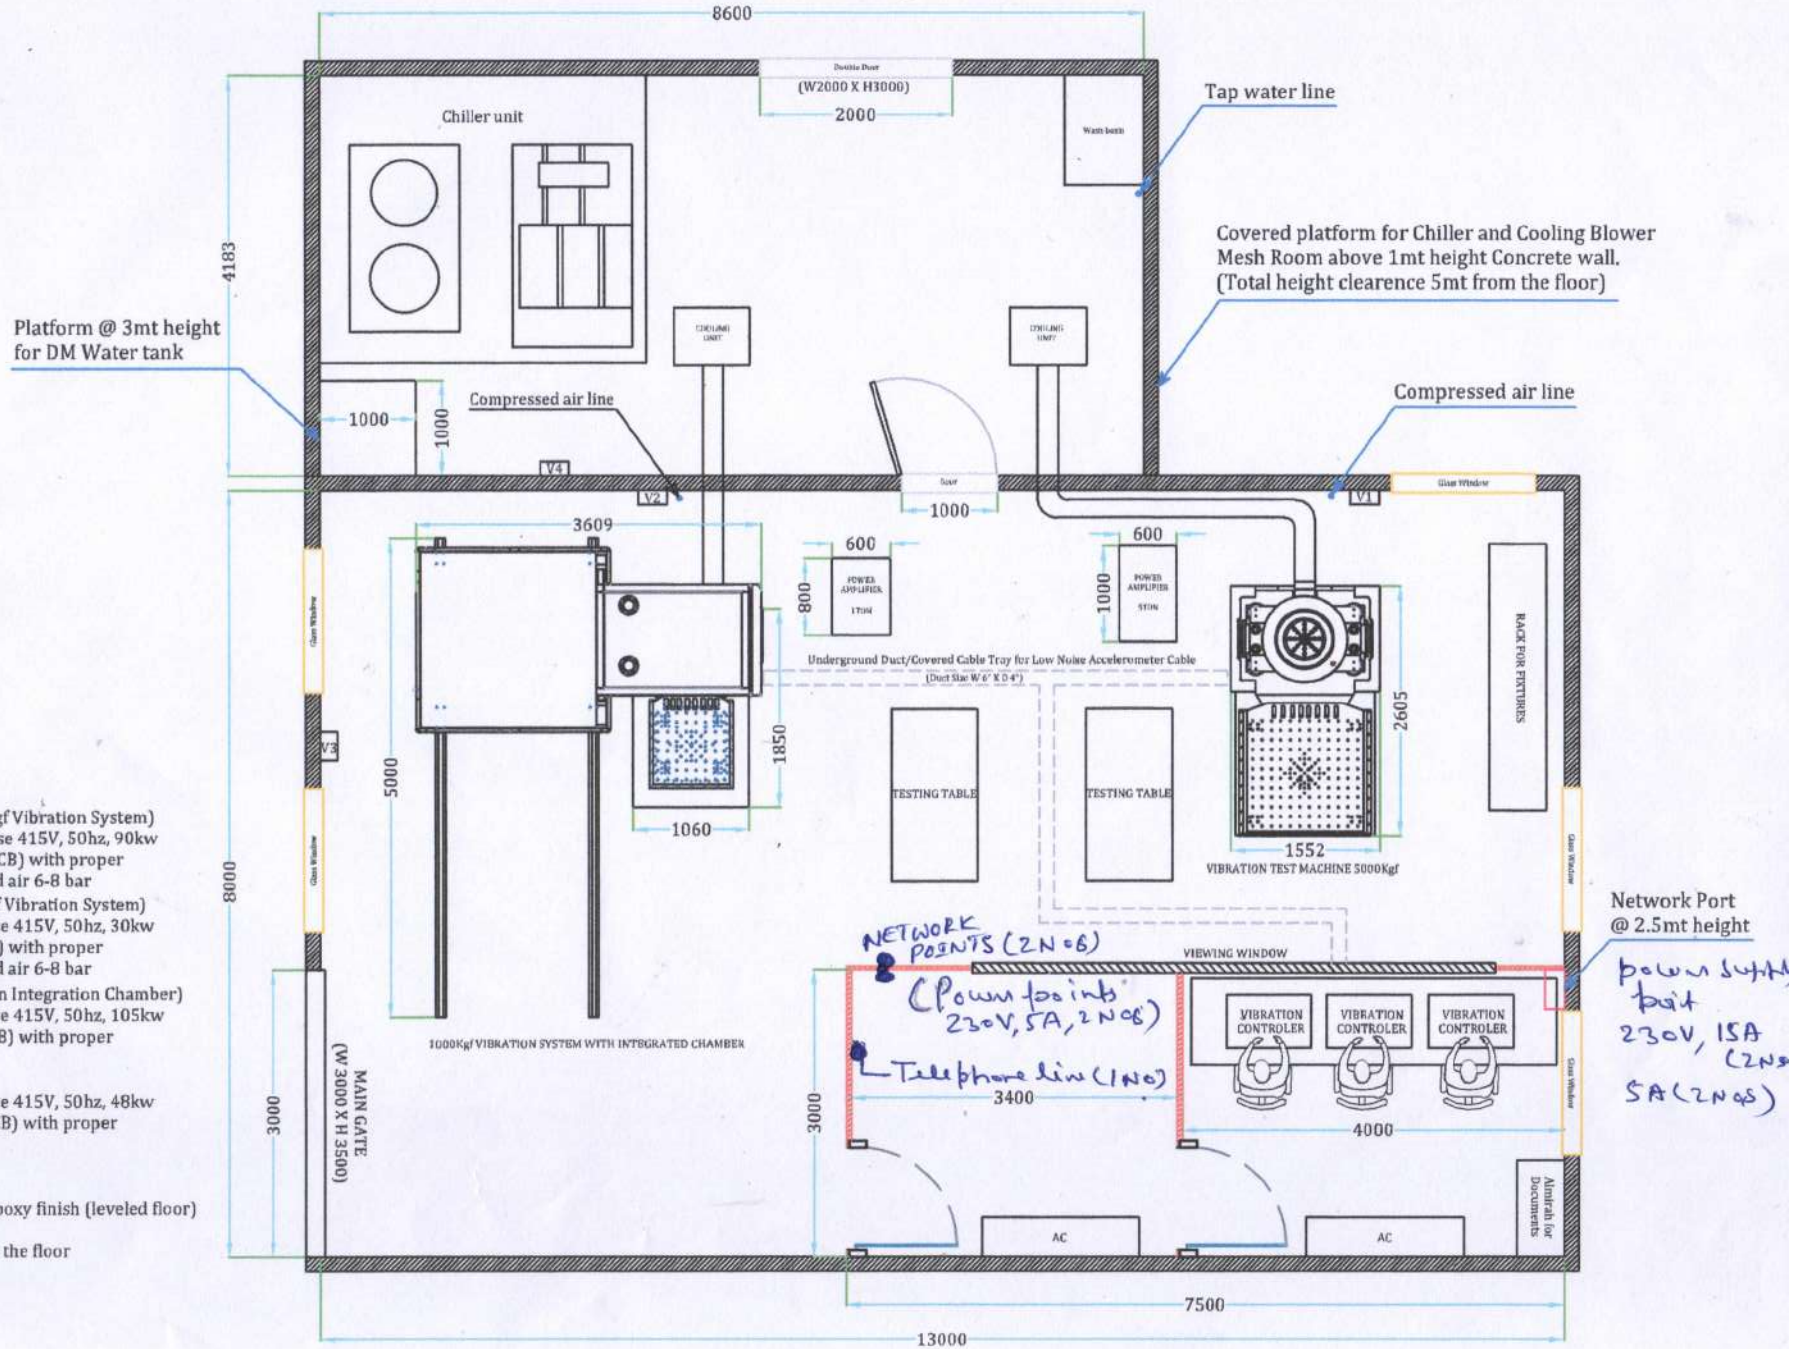

V1 - (Utilities for 5000 Kgf Vibration System)
Power supply 3-phase 415V, 50hz, 90kw
(4 pole, 160 amp MCCB) with proper
earthing, compressed air 6-8 bar

V2 - (Utilities for 1000Kgf Vibration System)
Power supply 3-phase 415V, 50hz, 30kw
(4 pole, 63 amp MCB) with proper
earthing, compressed air 6-8 bar

V3 - (Utilities for Vibration Integration Chamber)
Power supply 3-phase 415V, 50hz, 105kw
(4 pole, 250 amp MCB) with proper
earthing

V4 - (Utilities for Chiller)
Power supply 3-phase 415V, 50hz, 48kw
(4 pole, 125 amp MCB) with proper
earthing

Note:
1) 6" concrete floor with epoxy finish (leveled floor)
2) Air conditioned LAB
3) False roofing 4mt above the floor